
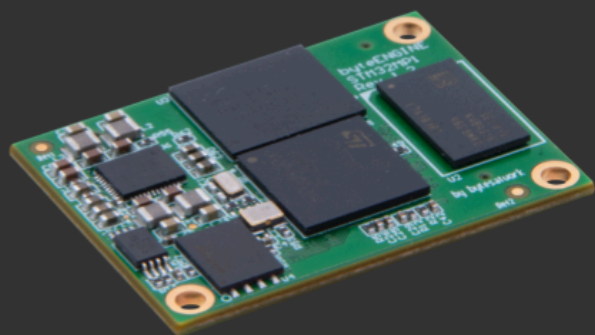


bytes**at**work

DataSheet

Rev. 2.0 27.06.2025

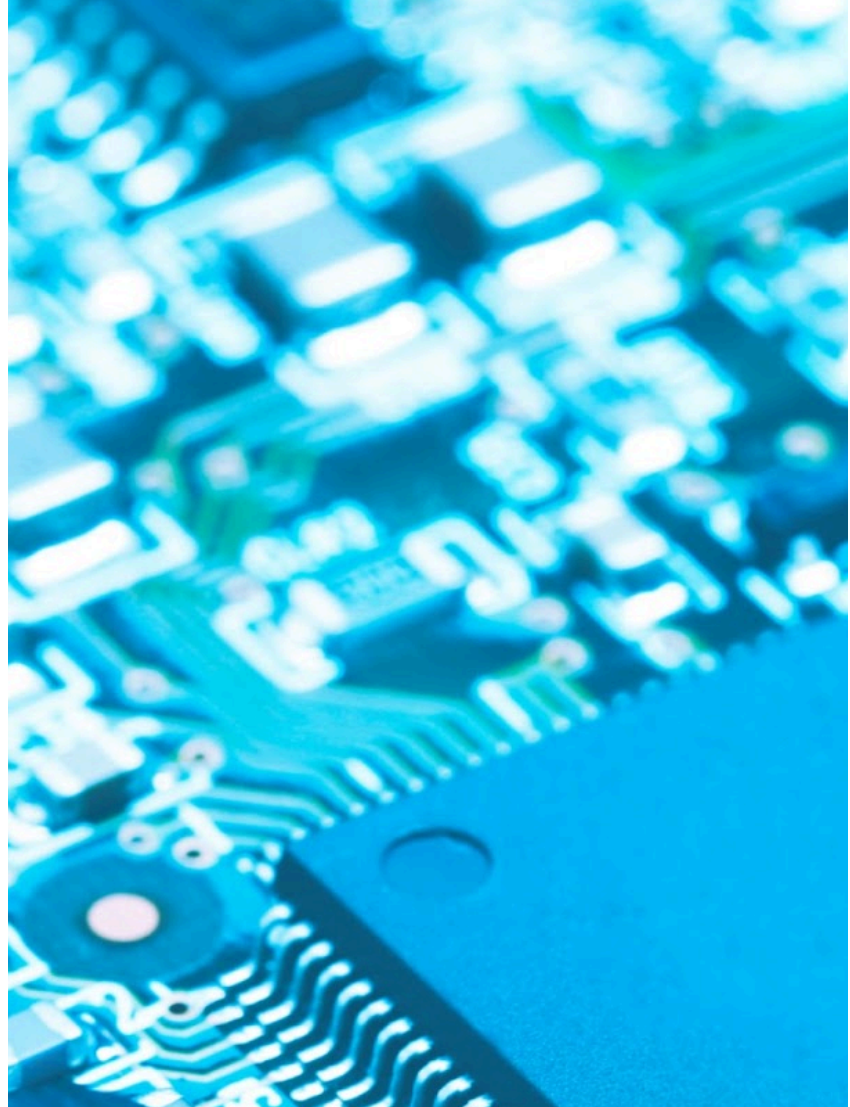

industrial computing module

byteENGINE STM32MP1x



Copyright Notice

Copyright 2025 bytes at work AG, CH-8406 Winterthur, Switzerland. All rights reserved.

Reproduction in any form or by any means without permission is prohibited. Bytes at work AG reserves the right to make improvements to the products described in this manual at any time without notice.

No part of this manual may be reproduced, copied, translated, or transmitted in any form or by any means without the prior written permission of the company. Information provided in this manual is intended to be accurate and reliable. However, bytes at work assumes no responsibility for its use, or for any infringements upon the rights of third parties that may result from its use.

The material in this document is for product information only and is subject to change without notice. While reasonable efforts have been made in the preparation of this document to assure its accuracy, bytes at work assumes no liabilities resulting from errors or omissions in this document, or from the use of the information contained herein. bytes at work reserves the right to make changes in the product design without notice to its users.

Trademarks

Product names, logos, brands, and other trademarks featured, or referred to are the property of their respective trademark holders. These include, but are not limited to U-Boot, Linux and ARM.

Disclaimer

Bytesatwork does not guarantee that the information in this manual is up-to-date, correct, complete or of good quality. Nor does bytesatwork assume guarantee for further usage of the information. Liability claims against bytesatwork, referring to material or non-material related damages caused, due to usage or non-usage of the information given in the manual, or due to usage of erroneous or incomplete information, are exempted, as long as there is no bytesatwork.

Bytesatwork explicitly reserves the rights to change or add to the contents of this manual or parts of it without special notification.

Imprint

Bytesatwork
Technoparkstrasse 7
CH-8406 Winterthur
+41 52 213 79 79

info@bytesatwork.ch
www.bytesatwork.io

Symbols and Typographic Conventions

These symbols represent important details or aspects for working with bytesatwork-products.



NOTICE

Follow instructions. Acting against the procedure described can lead to malfunction.



www.bytesatwork.io

Table of Contents

1. Revision History	4
2. Overview	5
2.1. General Information	5
2.2. Technical Data	6
2.3. Block Diagram of STM32MP15xxAC	8
2.4. Additional Information	9
2.5. Decision guidance byteENGINE STM32MP1x	10
2.6. Dimensions of byteENGINE STM32MP1x	11
2.7. byteENGINE STM32MP1x Connectors Layout	12
2.8. Connectors - Neltron 2001S-100G-270-020	13
2.9. byteENGINE STM32MP1x Connectors Overview	13
2.10. STM32CubeMX Tool - Configuring the STM32MP15xxAC CPU	14
3. Pinout functions	15
3.1. Restrictions	15
3.2. Carrier Board Connector X1	16
3.3. Carrier Board Connector X2	20
3.4. Power Supply	24
3.5. Boot Modes byteENGINE STM32MP1x	24
4. Ordering info	25
5. References	26

1. Revision History

Hardware Revision	Marking on PCB	Release Date	Info
1.2	byteENGINE STM32MP1x Rev. 1.2	2019	First version available for sales



NOTICE

This document refers to
byteENGINE STM32MP1x V1.2

2. Overview

2.1. General Information

The byteENGINE STM32MP1x is a high performance industrial oriented computing module. It allows you a short time to market, reducing development costs and substantial design risks.

The system on module (SOM) uses the STM32MP15x devices which are based on the high-performance dual-core ARM® Cortex®-A7 32-bit RISC core operating at up to 650 MHz/800 MHz. The STM32MP15xxAC

devices also embed a Cortex®-M4 32-bit RISC core operating at up to 200 MHz frequency. The Cortex®-M4 core features a floating point unit (FPU) single precision which supports ARM® single-precision data processing instructions and data types.

Furthermore, the STM32MP15xxAC devices embed a 3D graphic processing unit (Vivante® - OpenGL® ES 2.0) running at up to 533 MHz, with performances up to 26 MTriangle/s, 133 Mpixel/s.

Scalable platform

- > The STM32 family of 32-bit Flash micro-controllers based on the ARM® Cortex®-M processor are on the cutting edge of their industry thanks to the combination of functional integration, performance and extremely low current consumption.
- > The combination of Cortex®-A7 and Cortex®-M4 with full access to the peripherals is one-of-a-kind and makes a versatile range of designs possible. Depending on the application, you can use a PIN in Cortex®-M4 for your real-time application or a PIN in embedded Linux on Cortex®-A7.
- > The module byteENGINE STM32MP1x is the perfect basis for innovative developments.

Expandable design

- > The module provides a matching Linux-Kernel. As a result, the byteENGINE offers flexibility for almost any requirement.
- > The usage of familiar tools like CubeMX and Cube Library for the Cortex®-M4 is possible. Bytes at work offers the convenient Linux BSP tool with Yocto layer for the Cortex®-A7.
- > The free available open-source code allows reliable functionality and maximum extensibility.
- > The boot procedure can be secured so that only your software will run on the devices

2.2. Technical Data

Feature	Details	
CPU	Architecture	Single or Dual Core Arm® Cortex®-A57 processor
	CPU	STM32MP15xxAC See Link for further information: Block Diagram of STM32MP15x See ST Homepage for further Information: STM32MP1 Series
	Frequency (max.)	650 MHz / 800 MHz
	Floating Point	YES (NEON™)
	Co-Processors	32-bit ARM® Cortex®-M4 with FPU/MPU up to 200 Mhz
	Security	Secure boot, TrustZone® peripherals, active tamper
Memory External	SDRAM	Up to 1024 MB DDR3
	Flash	Up to 64 GB eMMC
	EEPROM	32 kB EEPROM (containing HW Configuration)
	SPI NOR Flash	16 MB (can be used as boot device)
Ethernet	Speed	10/100/1000 Mbps
Multimedia	Video	Parallel RGB 24 bit up to 1366x768@60 FPS
	MIPI	2 DSI Lanes up to 1 GHz: only STM32MP157
	2D/3D Graphics*	Vivante® - OpenGL® ES 2.0 Up to 26 Mtriangle/s, 133 Mpixel/s (only STM32MP157)
	HDMI-CEC	1
Expansion	SD/MMC/SDIO	3
Serial	I2S, PDM, S/PDIF	4
	SPI	6
	I2C	6
	UART	4
	USART	4
	CAN	2
USB	2.0 HS	1 Host + 1 OTG

Miscellaneous	Watchdog Timers	3
	FSMC	Yes
	JTAG	Yes
	GPIO	176 GPIOs
	PWM / ECAP / QEP	4
	Motor Ctrl Timers	2
	Boot Mode	Selectable with Strapping Pins on Baseboard
	RTC	With sub-second accuracy and hardware calendar and backup battery input
	ADC	2x 16 Bit
	DAC	2x 12 Bit
	Temp	1
Hardware Acceleration	AES	128, 192, 256, TDES
	HASH	MD5, SHA-1, SHA224, SHA256, HMAC
	TRNG	2
	CRC	2
Mechanical Information	Input Voltage	3,3 - 5 V
	Power Consumption	~2 W
	Dimensions	30 x 40 x 5 mm
	Operational Temperature	Industrial temperature range: -40 to +85° C Consumer temperature range: 0 to 85° C
	Connector	2x 100 pin
Operating System	Linux (yocto)	meta-bytesatwork available on github

2.3. Block Diagram of STM32MP15x


The ARM® Cortex®-A processor series is designed for devices undertaking complex compute tasks, such as hosting a rich operating system platform and supporting multiple software applications. Cortex®-A7, a power-efficient processor, is designed for use in a wide range of devices with differing requirements that demand a balance between power and performance.

The ARM® Cortex®-M processor series is designed to enable developers to create cost-sensitive and power-constrained solutions for a broad range of devices. Cortex®-M4 is a high-performance embedded processor developed to address digital signal control markets that demand an efficient, easy-to-use blend of control and signal processing capabilities.

The STM32MP15xxAC microprocessor contains the subsystems shown in the Functional Block Diagram:

Key Features of ST32MP15x

- > Single or Dual ARM® Cortex®-A7 processor @650/800MHz.
- > 32-Bit ARM® Cortex®-M4 processor @ up to 200MHz.
- > 3D GPU OpenGL ES2.0 graphics @522MHz.
- > Robust hardware enablement for differentiated peripherals: LCD, UART, USART, Gbit Ethernet, 2x USB, touch screen control, integrated industrial protocols.
- > 2000 MIPS and a power consumption of less than 2 Watt is Green IT by definition.
- > The scalable memory (128MB up to 1GB) can be operated from -40° up to +85° Celsius.

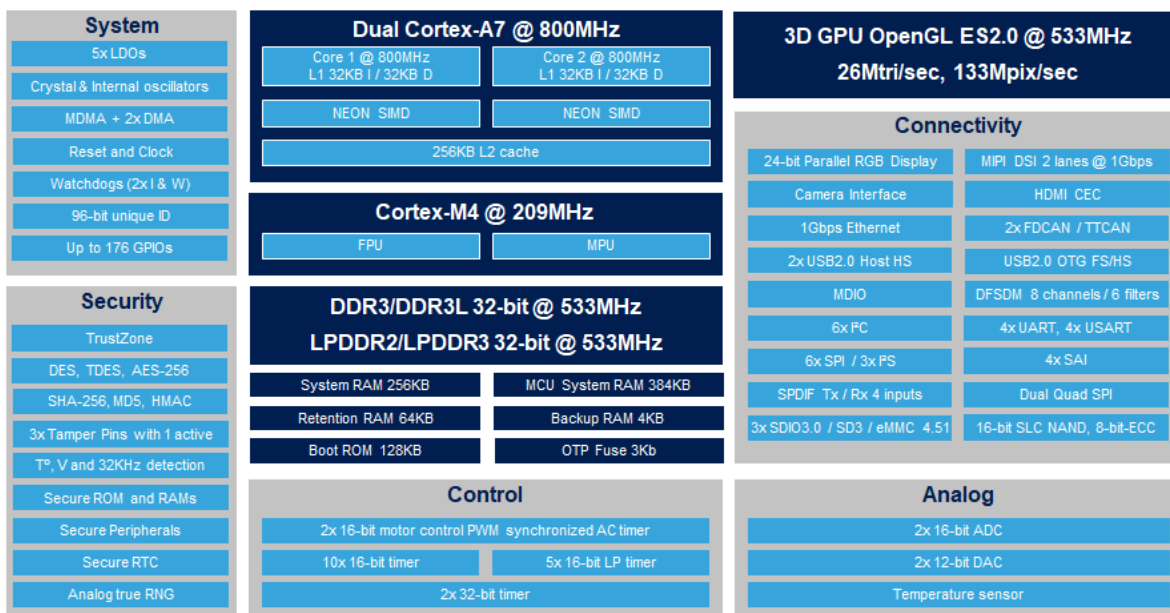

2.4. Additional Information

The STM32MP15x family offers a wide range of options. To facilitate the decision guidance, the selection guide has been extended:

Feature	STM32MP151	STM32MP153	STM32MP157
Cortex-A7	Single	Dual	Dual
Cortex-M4	Yes	Yes	Yes
GPU	No	No	Yes
Display	TFT	TFT	TFT / DSI
CAN	No	Yes	Yes

STM32MP15x-	Security	Frequency
A	Basic	650 MHz
C	Secure boot + cryptography (CRYP)	650 MHz
D	Basic	800 MHz
F	Secure boot + cryptography (CRYP)	800 MHz



For further information regarding the STM32MP15xxAC CPU, please visit the homepage of STMicroelectronics: [STM32MP1 Series](#)

2.5. Decision guidance byteENGINE STM32MP1x


The following four steps help identifying the suitable byteENGINE for the specific customer application.

- > **Step 1:** Select the needed CPU
 - > **Choose Options as described in [Additional Information](#)**
- > **Step 2:** Select the needed flash memory capacity
 - > **Choose eMMC 8 / 16 / 32 / 64 GB**
- > **Step 3:** Select the needed RAM capacity
 - > **Choose 512 / 1024 MB**
- > **Step 4:** Select the needed temperature range
 - > **Choose consumer or industrial**


2.6. Dimensions of byteENGINE STM32MP1x

The following illustration shows all important dimensions for mounting and installation of the industrial computing module byteENGINE STM32MP1x.

> All dimensions are indicated in millimetres (mm)

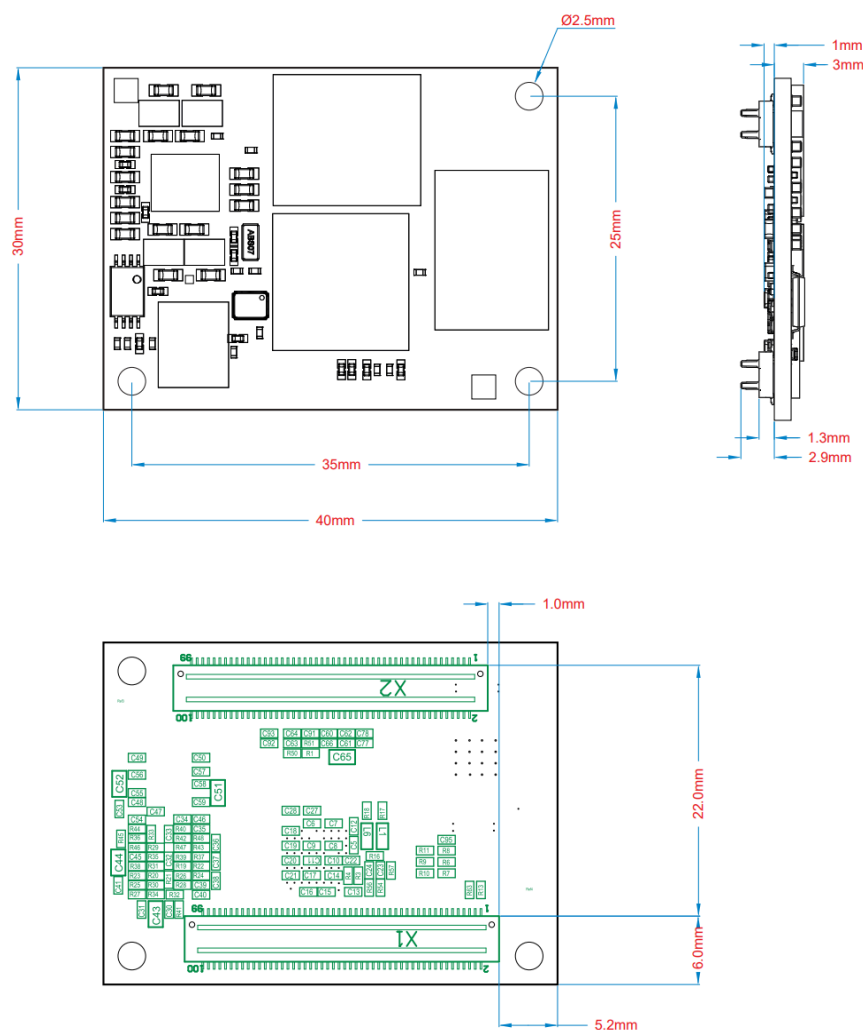


> Module design in scale 1:1:

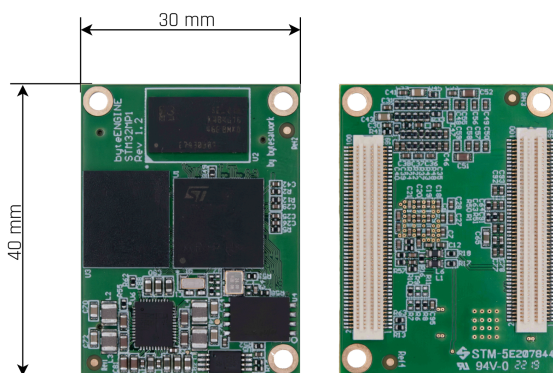

2.7. byteENGINE STM32MP1x Connectors Layout

The STM32MP1x is connected to the carrier board with 200 pins on two module connectors. The following picture shows the location of the connectors on the bottom side.

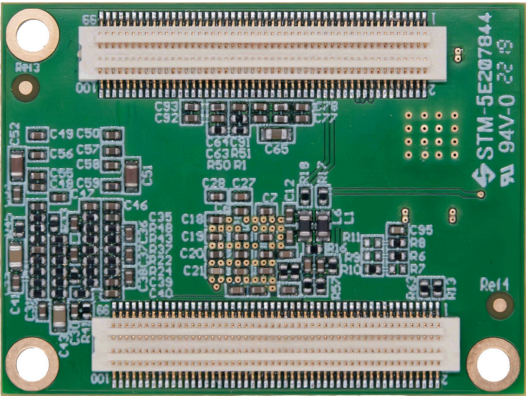

Connectors

X1	USB, GMII, SPI, UART, SAI, MMC, JTAG, ADC, I2C
X2	POWER, PWR BTN, PWM, DSI, FSMC, LTDC



[Schematic of the connectors X1 and X2](#)




NOTICE

The module is held in the connectors with a considerable retention force. To avoid damaging the modules' connectors as well as the carrier board connectors while removing the module the use of an extraction tool is strongly recommended.

2.8. Connectors - Neltron 2001S-100G-270-020


The byteENGINE uses two Neltron 0,5mm Board to Board Plug connectors. For more specific information about the connectors used, please visit:

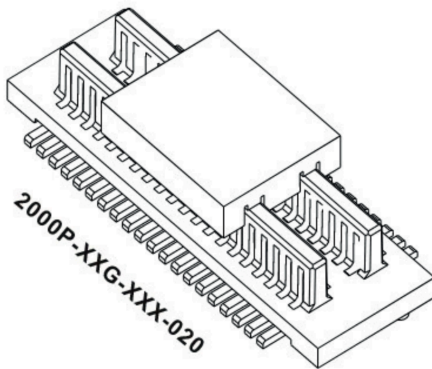

[Datasheet of Neltron 0.5mm Connectors](#)

2.9. byteENGINE STM32MP1x Connectors Overview

The following illustration shows the „default-configuration“ of the byteENGINE STM32MP1x. The function of the components shown in gray squares cannot be changed. The blue squares show the module connectors X1 and X2. The functions of X1 and X2 can be adapted and each connector module serves multiple functions. The detailed pinout-functions are shown in chapter [Pinout functions](#).

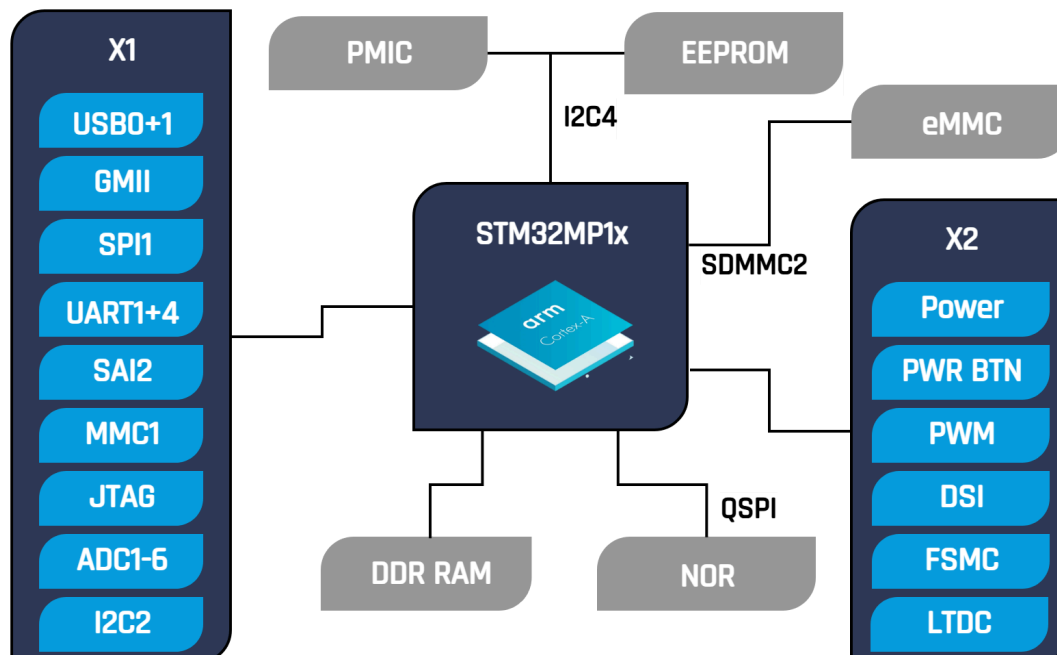

2.10. STM32CubeMX Tool - Configuring the STM32MP15xxAC CPU

STM32CubeMX is a graphical tool that allows a very easy configuration of STM32 microcontrollers and microprocessors, as well as the generation of the corresponding initialization C code for the ARM® Cortex®-M core or a partial Linux® Device Tree for ARM® Cortex®-A core), through a step-by-step process.

The first step consists in selecting the STMicroelectronics STM32 microcontroller or microprocessor that matches the required set of peripherals.

For microprocessors, the second step allows configuring the GPIOs and the clock setup for the whole system, and to interactively assign peripherals either to the ARM Cortex®-M or to the Cortex®-A world. Specific utilities, such as DDR configuration and tuning, make it easy to get started with STM32 microprocessors. For Cortex®-M core, the configuration includes additional steps that are exactly similar to those described for microcontrollers.

For microcontrollers and microprocessor ARM® Cortex®-M, the second step consists in configuring each required embedded software thanks to a pinout-conflict solver, a clock-tree setting helper, a power-consumption calculator, and an utility that configures the peripherals (such as GPIO or USART) and the middleware stacks (such as USB or TCP/IP).

Eventually the user launches the generation that matches the selected configuration choices. This step provides the initialization C code for the ARM® Cortex®-M, ready to be used within several development environments, or a partial Linux® device tree for the ARM® Cortex®-A.

The Link below delivers a prepared project from bytes at work.



[STM32CubeMX Tool](#)

[byteENGINE STM32MP1x prepared CubeMX Project](#)



NOTICE

Follow the Link to the STM32CubeMX Tool. You need to install the Tool. Then choose the Processor.

3. Pinout functions

3.1. Restrictions

These peripherals are internally connected and should not be utilized in the customer design if the components are populated and in use.



WARNING:

EEPROM: Production data storage. Do not use for application, readonly usage.

Restricted peripherals

I2C4 PMIC and EEPROM

SDMMC2 eMMC

QUADSPI SPI NOR Flash

Ball	Pad	Name	Used for
A10	PG6	SDMMC2_CMD	eMMC
A11	PB3	SDMMC2_D2	eMMC
A13	PA8	SDMMC2_D4	eMMC
B10	PB9	SDMMC2_D5	eMMC
B11	PC7	SDMMC2_D7	eMMC
B12	PB15	SDMMC2_D1	eMMC
B13	PB4	SDMMC2_D3	eMMC
C11	PE5	SDMMC2_D6	eMMC
C13	PB14	SDMMC2_D0	eMMC
C9	PE3	SDMMC2_CK	eMMC
G2	PZ4	I2C4_SCL	PMIC/EEPROM
H2	PZ5	I2C4_SDA	PMIC/EEPROM
P4	PI11	PWR_WKUP5	PMIC
T2	PA14	GPIO_Output	PMIC_WAKEUP
AA13	PF6	QUADSPI_BK1_IO3	SPI NOR Flash
AA14	PF9	QUADSPI_BK1_IO1	SPI NOR Flash
AB12	PF7	QUADSPI_BK1_IO2	SPI NOR Flash
AC11	PF8	QUADSPI_BK1_IO0	SPI NOR Flash
Y12	PF10	QUADSPI_CLK	SPI NOR Flash
Y14	PB6	QUADSPI_BK1_NCS	SPI NOR Flash

3.2. Carrier Board Connector X1

Pin	Signal Name	Alternative Modes																	
		0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
1	BOOT2																		
2	GND																		
3	n.c.																		
4	PA15	ADC1_EXTI15	ADC2_EXTI15	CEC, I2S1_WS	I2S3_WS, SAI4_D2	SAI4_FS_A	SDMMC1_CD IR	SDMMC1_D5	SDMMC2_CDIR	SDMMC2_D5	SPI1_NSS	SPI3_NSS	SPI6_NSS	SYS_DBTRGI	TIM2_CH1	TIM2_ETR	UART4_DE	UART4_RTS	UART7_TX
5	NRST																		
6	GND																		
7	PB13	DFSDM1_CKIN1	DFSDM1_CK OUT	ETH1_TXD1	I2S2_CK	LPTIM2_OUT	SPI2_SCK	TIM1_CH1N	UART5_TX	USART3_CTS	USART3_NSS								
8	PB11	ADC1_EXTI11	ADC2_EXTI11	DFSDM1_CK IN7	DSIHOST_TE	ETH1_TX_CTL	ETH1_TX_EN	I2C2_SDA	LPTIM2_ETR	LTDC_G5	TIM2_CH4	USART3_RX							
9	USB_DM1	USBH_HS1_DM	USBH_HS1_ DM																
10	USB_DM2	USB_OTG_HS_DM	USBH_HS2_ DM	USB_OTG_H S_DM															
11	USB_DP1	USBH_HS1_DP	USBH_HS1_ DP																
12	USB_DP2	USB_OTG_HS_DP	USBH_HS2_ DP	USB_OTG_H S_DP															
13	n.c.																		
14	OTG_VBUS	USB_OTG_FS_V BUS	USB_OTG_H S_VBUS	USB_OTG_FS _VBUS															
15	PB5		DCMI_D10	ETH1_CLK	ETH1_PPS_OUT	I2C1_SMBA													
16	PA10	USB_OTG_HS_ID	DCMI_D1	I2S3_WS	LTDC_B1	SAI4_FS_B	SPI3_NSS	TIM1_CH3	USART1_RX	USB_OTG_HS_ID	USB_OTG_FS_ID	MDIOS_MDIO							
17	GND																		
18	GND																		
19	PC1	ETH1_MDC	ADC1_INN10	ADC1_INP11	ADC2_INN10	ADC2_INP11	DFSDM1_CK1 N4	DFSDM1_DATA N0	ETH1_MDC	I2S2_SDO	SAI1_D1	SAI1_SD_A	SDMMC2_CK	SPI2_MOSI	SYS_TRACED0	SYS_WKUP6	MDIOS_MDC	TAMP_IN3	
20	PA2	ETH1_MDIO	ADC1_INP14	ETH1_MDIO	LPTIM4_OUT	LTDC_R1	SAI2_SCK_B	SDMMC2_D0D IR	SYS_WKUP2	TIM15_CH1	TIM2_CH3	TIM5_CH3	USART2_TX	MDIOS_MDIO					
21	GND																		

Pin	Signal Name	Alternative Modes																	
		0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
22	GND																		
23	PB12	ETH1_TXD0	DFSDM1_DATIN1	ETH1_TXD0	I2C2_SMBA	I2C6_SMBA	I2S2_WS	SPI2_NSS	TIM1_BKIN	UART5_RX	USART3_CK	USART3_RX	FDCAN2_RX						
24	PC4	ETH1_RXD0	ADC1_INP4	ADC2_INP4	DFSDM1_CKIN2	ETH1_RXD0	I2S1_MCK	SPDIFRX_IN2											
25	PG14	ETH1_TXD1	ETH1_TXD1	LPTIM1_ETR	LTDC_B0	QUADSPI_BK2_I03	SAI4_D1	SAI4_SD_A	SPI6_MOSI	SYS_TRACED1	USART6_TX	FMC_A25							
26	PC5	ETH1_RXD1	ADC1_INN4	ADC1_INP8	ADC2_INN4	ADC2_INP8	DFSDM1_DATIN2	ETH1_RXD1	SAI1_D3	SAI1_D4	SAI4_D3	SAI4_D4	SPDIFRX_IN3						
27	PC2	ETH1_TXD2	ADC1_INN11	ADC1_INP12	DFSDM1_CKIN1	DFSDM1_CKOUT	ETH1_TXD2	I2S2_SDI	SPI2_MISO										
28	PH6	ETH1_RXD2	DCMI_D8	ETH1_RXD2	I2C2_SMBA	SPI5_SCK	TIM12_CH1	MDIOS_MDIO											
29	PE2	ETH1_TXD3	ETH1_TXD3	I2C4_SCL	QUADSPI_BK1_I02	SAI1_CK1	SAI1_MCLK_A	SPI4_SCK	SYS_TRACECLK	FMC_A23									
30	PH7	ETH1_RXD3	DCMI_D9	ETH1_RXD3	I2C3_SCL	SPI5_MISO	MDIOS_MDC												
31	PG4	ETH1_GTX_CLK	ETH1_GTX_CLK	TIM1_BKIN2	FMC_A14														
32	PA1	ETH1_RX_CLK	ADC1_INN16	ADC1_INP17	ETH1_CLK	ETH1_REF_CLK	ETH1_RX_CLK	LPTIM3_OUT	LTDC_R2	QUADSPI_BK1_I03	SAI2_MCLK_B	TIM15_CH1N	TIM2_CH2	TIM5_CH2	UART4_RX	USART2_DE	USART2_RTS		
33	PG11	ETH1_TX_EN	ADC1_EXTI11	ADC2_EXTI11	DCMI_D3	ETH1_TX_CTL	ETH1_TX_EN	LTDC_B3	SPDIFRX_IN0	SYS_TRACED11	UART4_TX	USART1_TX							
34	PB10	ETH1_RX_ER	DFSDM1_DATIN7	ETH1_RX_ER	I2C2_SCL	I2S2_CK	LPTIM2_IN1	LTDC_G4	QUADSPI_BK1_NCS	SPI2_SCK	TIM2_CH3	USART3_TX							
35	PA3	ETH1_COL	ADC1_INP15	ETH1_COL	LPTIM5_OUT	LTDC_B2	LTDC_B5	SYS_PVD_IN	TIM15_CH2	TIM2_CH4	TIM5_CH4	USART2_RX							
36	PA7	ETH1_RX_DV	ADC1_INN3	ADC1_INP7	ADC2_INN3	ADC2_INP7	ETH1_CRS_DV	ETH1_RX_CTL	ETH1_RX_DV	I2S1_SDO	QUADSPI_CLK	SAI4_D1	SAI4_SD_A	SPI1_MOSI	SPI6_MOSI	TIM14_CH1	TIM1_CH1N	TIM3_CH2	TIM8_CH1N
37	PH2	ETH1_CRS	ETH1_CRS	LPTIM1_IN2	LTDC_R0	QUADSPI_BK2_I00	SAI2_SCK_B												
38	PA13	DBTRGO	DBTRGI	MCO1	UART4_TX	EVENT-OUT													
39	GND																		
40	GND																		
41	PZ3	SPI1_NSS	I2C2_SDA	I2C4_SDA	I2C5_SDA	I2C6_SDA	I2S1_WS	SPI1_NSS	SPI6_NSS	USART1_CTS	USART1_NSS								
42	PZ1	SPI1_MISO	I2C2_SDA	I2C4_SDA	I2C5_SDA	I2C6_SDA	I2S1_SDI	SPI1_MISO	SPI6_MISO	USART1_RX									
43	PE1	FMC_NBL1	DCMI_D3	I2S2_MCK	LPTIM1_IN2	SAI3_SD_B	UART8_TX	FMC_NBL1											
44	PZ2	SPI1_MOSI	I2C2_SCL	I2C4_SMBA	I2C5_SMBA	I2C6_SCL	I2S1_SDO	SPI1_MOSI	SPI6_MOSI	USART1_TX									
45	PZ0	SPI1_SCK	I2C2_SCL	I2C6_SCL	I2S1_CK	SPI1_SCK	SPI6_SCK	USART1_CK											
46	GND																		
47	GND																		

Pin	Signal Name	Alternative Modes																	
		0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
48	PC3	TRACECLK	DFSDM1_DATAIN1	SPI2_MOSI	I2S2_SDO	ETH1_GMII_TX_CLK	ETH1_MII_TX_CLK	EVENT-OUT	ADC1_INP13	ADC1_INN12									
49	PH13	UART4_TX	FDCAN1_TX	LTDC_G2	TIM8_CH1N	UART4_TX													
50	PA9	USART1_TX	DAC1_EXTI9	DCMI_D0	I2C3_SMB	I2S2_CK	LTDC_R5	SDMMC2_CD	SDMMC2_D5	SPI2_SCK	TIM1_CH2	USART1_TX							
51	PH14	UART4_RX	DCMI_D4	FDCAN1_RX	LTDC_G3	TIM8_CH2N	UART4_RX												
52	PB7	USART1_RX	DCMI_VSYNC	DFSDM1_CKIN5	I2C1_SDA	I2C4_SDA	SDMMC2_D1	TIM17_CH1N	TIM4_CH2	USART1_RX	FMC_NL								
53	PH5	I2C2_SDA	I2C2_SDA	SAI4_SD_B	SPI5_NSS														
54	PA11	USART1_CTS	ADC1_EXTI11	ADC2_EXTI11	FDCAN1_RX	I2C5_SCL	I2C6_SCL	I2S2_WS	LTDC_R4	SPI2_NSS	TIM1_CH4	UART4_RX	USART1_CTS	USART1_NSS	USB_OTG_FS_DM				
55	PH4	I2C2_SCL	I2C2_SCL	LTDC_G4	LTDC_G5														
56	PA12	USART1_RTS	FDCAN1_TX	I2C5_SDA	I2C6_SDA	LTDC_R5	SAI2_FS_B	TIM1_ETR	UART4_TX	USART1_DE	USART1_RTS	USB_OTG_FS_DP							
57	PG15		ADC1_EXTI15	ADC2_EXTI15	DCMI_D13	I2C2_SDA													
58	GND																		
59	PE0	SAI2_MCLK_A	DCMI_D2	I2S3_CK	LPTIM1_ETR	LPTIM2_ETR	SAI2_MCLK_A	SAI4_MCLK_B	SPI3_SCK	TIM4_ETR	UART8_RX	FMC_NBL0							
60	PI7	SAI2_FS_A	DCMI_D7	LTDC_B7	SAI2_FS_A	TIM8_CH3													
61	PD13	SAI2_SCK_A	DSIHOST_TE	I2C1_SDA	I2C4_SDA	I2S3_MCK	LPTIM1_OUT	QUADSPI_BK1_IO3	SAI2_SCK_A	TIM4_CH2	FMC_A18								
62	PE6	SAI2_MCLK_B	DCMI_D7	LTDC_G1	SAI1_D1	SAI1_SD_A	SAI2_MCLK_B	SDMMC1_D2	SDMMC2_D0	SPI4_MOSI	SYS_TRACED2	TIM15_CH2	TIM1_BKIN2	FMC_A22					
63	PB2	TRACED4	RTC_OUT2	SAI1_D1	DFSDM1_CKIN1	USART1_RX	I2S_CKIN	SAI1_SD_A	SPI3_MOSI	I2S3_SDO	UART4_RX	QUADSPI_CLK	EVENT-OUT						
64	PE12	SAI2_SCK_B	DFSDM1_DATAIN5	FMC_D9	LTDC_B4	SAI2_SCK_B	SDMMC1_D0_DIR	SPI4_SCK	TIM1_CH3N										
65	PI6	SAI2_SD_A	DCMI_D6	LTDC_B6	SAI2_SD_A	TIM8_CH2													
66	PA0	SAI2_SD_B	ADC1_INP16	ETH1_CRS	SAI2_SD_B	SDMMC2_CMD	SYS_WKUP1	TIM15_BKIN	TIM2_CH1	TIM2_ETR	TIM5_CH1	TIM8_ETR	UART4_TX	USART2_CTS	USART2_NSS				
67	GND																		
68	GND																		
69	PC8	SDMMC1_D0	DCMI_D2	SDMMC1_D0	SYS_TRACED0	TIM3_CH3	TIM8_CH3	UART4_TX	UART5_DE	UART5_RTS	USART6_CK								
70	PD2	SDMMC1_CMD	DCMI_D11	I2C5_SMB	SDMMC1_CMD	TIM3_ETR	UART4_RX	UART5_RX											
71	PC9	SDMMC1_D1	DAC1_EXTI9	DCMI_D3	I2C3_SDA	I2S_CKIN	LTDC_B2	QUADSPI_BK1_IO0	SDMMC1_D1	SYS_TRACED1	TIM3_CH4	TIM8_CH4	UART5_CTS						
72	PC12	SDMMC1_CK	DCMI_D9	I2S3_SDO	RCC_MCO_2	SAI4_D3	SAI4_SD_B	SDMMC1_CK	SPI3_MOSI	SYS_TRACECLK	UART5_TX	USART3_CK							
73	PC10	SDMMC1_D2	DCMI_D8	DFSDM1_CKIN5	I2S3_CK	LTDC_R2	QUADSPI_BK1_IO1	SAI4_MCLK_B	SDMMC1_D2	SPI3_SCK	SYS_TRACED2	UART4_TX	USART3_TX						
74	VMMC (3V3)																		

Pin	Signal Name	Alternative Modes																	
		0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
75	PC11	SDMMC1_D3	ADC1_EXTI11	ADC2_EXTI11	DCMI_D4	DFSDM1_DAT1N5	I2S3_SDI	QUADSPI_BK2_LNCS	SAI4_SCK_B	SDMMC1_D3	SPI3_MISO	SYS_TRACED3	UART4_RX	USART3_RX					
76	VMMC (3V3)																		
77	GND																		
78	GND																		
79	NJTRST	SYS_JTRST	SYS_JTRST																
80	JTDO-TRACE SWO	SYS_JTDO-SWO	SYS_JTDO-SWO																
81	JTCK-SWCLK	SYS_JTCK-SWCLK	SYS_JTCK-SWCLK																
82	JTDI	SYS_JTDI	SYS_JTDI																
83	JTMS-SWDIO	SYS_JTMS-SWDIO	SYS_JTMS-SWDIO																
84	PI8	TAMP_IN2	RTC_LSCO	SYS_WKUP4	RTC_OUT2	TAMP_IN2	TAMP_OUT3												
85	AGND																		
86	PC13	TAMP_OUT2	RTC_LSCO	RTC_OUT_ALARM1	RTC_OUT_CALIB1	RTC_TS	SYS_WKUP3	TAMP_IN1	TAMP_OUT2	TAMP_OUT3									
87	AGND																		
88	GND																		
89	ANA0	ADC1_INP0	ADC1_INN1	ADC1_INP0	ADC2_INN1	ADC2_INP0													
90	ANA1	ADC1_INP1	ADC1_INP1	ADC2_INP1															
91	PF11	ADC1_INP2	ADC1_EXTI11	ADC1_INP2	ADC2_EXTI11	DCMI_D12	LTDC_G5	SAI2_SD_B	SPI5_MOSI										
92	n.c.	ADC1_INP9																	
93	PB1	ADC1_INP5	ADC1_INP5	ADC2_INP5	DFSDM1_DATA1N1	ETH1_RXD3	LTDC_G0	LTDC_R6	TIM1_CH3N	TIM3_CH4	TIM8_CH3N	MDIOS_MDC							
94	PC0	ADC1_INP10	ADC1_INP10	ADC2_INP10	DFSDM1_CK1N0	DFSDM1_DAT1N4	LPTIM2_IN2	LTDC_R5	QUADSPI_BK2_LNCS	SAI2_FS_B									
95	PA4	ADC1_INP18	ADC1_INP18	ADC2_INP18	DAC1_OUT1	DCMI_HSYNC	I2S1_WS	I2S3_WS	LTDC_VSYNC	SAI4_D2	SAI4_FS_A	SPI1_NSS	SPI3_NSS	SPI6_NSS	SYS_HDP0	TIM5_ETR	USART2_CK		
96	PA5	ADC1_INP19	ADC1_INN18	ADC1_INP19	ADC2_INN18	ADC2_INP19	DAC1_OUT2	I2S1_CK	LTDC_R4	SAI4_CK1	SAI4_MCLK_A	SPI1_SCK	SPI6_SCK	TIM2_CH1	TIM2_ETR	TIM8_CH1N			
97	GND																		
98	GND																		
99	GND																		
100	GND																		

3.3. Carrier Board Connector X2

Pin	Signal Name	Alternative Modes															
		0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
1	VIN																
2	VIN																
3	VIN																
4	VIN																
5	VIN																
6	VIN																
7	VIN																
8	VIN																
9	VIN																
10	VIN																
11	GND																
12	GND																
13	GND																
14	GND																
15	GND																
16	GND																
17	PWR_BUTTON																
18	PG8	TIM2_CH1	ETH1_CLK	ETH1_PPS_OUT	LTDC_G7	SAI4_D2	SAI4_FS_A	SPDIFRX_IN	SPI6_NSS	SYS_TRACED15	TIM2_CH1	TIM2_ETR	TIM8_ETR	USART3_DE	USART3_RTS	USART6_DE	USART6_RTS
19	PWR_ON																
20	EXT_WAKEUP																
21	VBAT																
22	PI3		DCMI_D10	I2S2_SDO	SPI2_MOSI	TIM8_ETR											
23	DSIHOST_CK_P	DSIHOST_CK_P	DSIHOST_CK_P														
24	GND																
25	DSIHOST_CK_N	DSIHOST_CK_N	DSIHOST_CK_N														

Pin	Signal Name	Alternative Modes															
		0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
26	GND																
27	DSIHOST_D1_P	DSIHOST_D1_P	DSIHOST_D1_P														
28	GND																
29	DSIHOST_D1_N	DSIHOST_D1_N	DSIHOST_D1_N														
30	VREFP	VREFP															
31	DSIHOST_D0_P	DSIHOST_D0_P	DSIHOST_D0_P														
32	VSSA	VSSA															
33	DSIHOST_D0_N	DSIHOST_D0_N	DSIHOST_D0_N														
34	GND																
35	PD6	FMC_NWAIT	DCMI_D10	DFSDM1_CKIN4	DFSDM1_DATIN1	FMC_NWAIT	I2S3_SDO	LTDC_B2	SAI1_D1	SAI1_SD_A	SPI3_MOSI	TIM16_CH1N	USART2_RX				
36	PG2	FMC_A12	ETH1_TXD6	RCC_MCO_2	SYS_TRACED2	TIM8_BKIN	FMC_A12										
37	PG3	FMC_A13	DFSDM1_CKIN1	ETH1_TXD7	SYS_TRACED3	TIM8_BKIN2	FMC_A13										
38	PD11	FMC_CLE	ADC1_EXTI11	ADC2_EXTI11	FMC_CLE	I2C1_SMBA	I2C4_SMBA	LPTIM2_IN2	QUADSPI_BK1_I00	SAI2_SD_A	USART3_CTS	USART3_NSS	FMC_A16				
39	PD12	FMC_ALE	FMC_ALE	I2C1_SCL	I2C4_SCL	LPTIM1_IN1	LPTIM2_IN1	QUADSPI_BK1_I01	SAI2_FS_A	TIM4_CH1	USART3_DE	USART3_RTS	FMC_A17				
40	PG5	FMC_A15	ETH1_CLK125	TIM1_ETR	FMC_A15												
41	PD4	FMC_NOE	DFSDM1_CKIN0	FMC_NOE	SAI3_FS_A	SDMMC3_D1	USART2_DE	USART2_RTS									
42	PD9	FMC_D14	DAC1_EXTI9	DFSDM1_DATIN3	FMC_D14	LTDC_B0	SAI3_SD_B	USART3_RX									
43	PD5	FMC_NWE	FMC_NWE	SDMMC3_D2	USART2_TX												
44	PD7	FMC_NE1	DFSDM1_CKIN1	DFSDM1_DATIN4	I2C2_SCL	SDMMC3_D3	SPDIFRX_IN0	SYS_TRACED6	USART2_CK	FMC_NE1							
45	PD3	FMC_CLK	DCMI_D5	DFSDM1_CKOUT	DFSDM1_DATIN0	I2S2_CK	LTDC_G7	SDMMC1_D1_23DIR	SDMMC1_D7	SDMMC2_D1_23DIR	SDMMC2_D7	SPI2_SCK	SYS_HDP5	USART2_CTS	USART2_NSS	FMC_CLK	
46	PG9	FMC_NCE	DAC1_EXTI9	DCMI_VSYNC	FMC_NCE	QUADSPI_BK2_I02	SAI2_FS_B	SPDIFRX_IN3	SYS_DBTRGO	USART6_RX	FMC_NE2						
47	PG10	LTDC_B2	DCMI_D2	LTDC_B2	LTDC_G3	QUADSPI_BK2_I02	SAI2_SD_B	SYS_TRACED10	UART8_CTS	FMC_NE3							
48	PH8	LTDC_R2	DCMI_HSYNC	I2C3_SDA	LTDC_R2	TIM5_ETR											
49	PB0	LTDC_G1	ADC1_INN5	ADC1_INP9	ADC2_INN5	ADC2_INP9	DFSDM1_CKOUT	ETH1_RXD2	LTDC_G1	LTDC_R3	TIM1_CH2N	TIM3_CH3	TIM8_CH2N	UART4_CTS	MDIOS_MDIO		
50	PH3	LTDC_R1	DFSDM1_CKIN4	ETH1_COL	LTDC_R1	QUADSPI_BK2_I01	SAI2_MCLK_B										
51	PG13	LTDC_R0	ETH1_TXD0	LPTIM1_OUT	LTDC_R0	SAI1_CK2	SAI1_SCK_A	SAI4_CK1	SAI4_MCLK_A	SPI6_SCK	SYS_TRACED0	USART6_CTS	USART6_NSS	FMC_A24			
52	PG12	LTDC_B1	ETH1_PHY_INTN	LPTIM1_IN1	LTDC_B1	LTDC_B4	SAI4_CK2	SAI4_SCK_A	SPDIFRX_IN1	SPI6_MISO	USART6_DE	USART6_RTS	FMC_NE4				

Pin	Signal Name	Alternative Modes															
		0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
53	PE4	LTDC_B0	DCMI_D4	DFSDM1_D ATIN3	LTDC_B0	SAI1_D2	SAI1_FS_A	SDMMC1_CK1 N	SDMMC1_D4	SDMMC2_CK1 N	SDMMC2_D4	SPI4_NSS	SYS_TRACED1	TIM15_CH1N	FMC_A20		
54	PE14	LTDC_G0	FMC_D11	LTDC_CLK	LTDC_G0	SAI2_MCLK_B	SDMMC1_D1 23DIR	SPI4_MOSI	TIM1_CH4	UART8_DE	UART8_RTS						
55	PE9	FMC_D6	DAC1_EXTI9	DFSDM1_C KOUT	FMC_D6	QUADSPI_B K2_I02	TIM1_CH1	UART7_DE	UART7_RTS								
56	PE10	FMC_D7	DFSDM1_DA TIN4	FMC_D7	QUADSPI_B K2_I03	TIM1_CH2N	UART7_CTS										
57	PE7	FMC_D4	DFSDM1_DA TIN2	FMC_D4	QUADSPI_B K2_I00	TIM1_ETR	TIM3_ETR	UART7_RX									
58	PE8	FMC_D5	DFSDM1_CK IN2	FMC_D5	QUADSPI_B K2_I01	TIM1_CH1N	UART7_TX										
59	PD0	FMC_D2	DFSDM1_CK IN6	DFSDM1_D ATIN7	FDCAN1_RX	FMC_D2	I2C5_SDA	I2C6_SDA	SAI3_SCK_A	SDMMC3_CMD	UART4_RX						
60	PD1	FMC_D3	DFSDM1_CK IN7	DFSDM1_D ATIN6	FDCAN1_TX	FMC_D3	I2C5_SCL	I2C6_SCL	SAI3_SD_A	SDMMC3_D0	UART4_TX						
61	PD14	FMC_D0	FMC_D0	SAI3_MCLK_B	TIM4_CH3	UART8_CTS											
62	PD15	FMC_D1	ADC1_EXTI15	ADC2_EXTI15	FMC_D1	SAI3_MCLK_A	TIM4_CH4	UART8_CTS									
63	PG0	FMC_A10	DFSDM1_DA TIN0	ETH1_TXD4	SYS_TRACE D0	FMC_A10											
64	PG1	FMC_A11	ETH1_TXD5	SYS_TRACED1	FMC_A11												
65	PF14	FMC_A8	ADC2_INN2	ADC2_INP6	DFSDM1_C KIN6	ETH1_RXD6	I2C1_SCL	I2C4_SCL	SYS_TRACED6	FMC_A8							
66	PF15	FMC_A9	ADC1_EXTI15	ADC2_EXTI15	ETH1_RXD7	I2C1_SDA	I2C4_SDA	SYS_TRACED	FMC_A9								
67	PF12	FMC_A6	ADC1_INN2	ADC1_INP6	ETH1_RXD4	SYS_TRACED 4	FMC_A6										
68	PF13	FMC_A7	ADC2_INP2	DFSDM1_DAT IN3	DFSDM1_DAT IN6	ETH1_RXD5	I2C1_SMBA	I2C4_SMBA	SYS_TRACED5	FMC_A7							
69	PF4	FMC_A4	SDMMC3_D1	SDMMC3_D 123DIR	USART2_RX	FMC_A4											
70	PF5	FMC_A5	SDMMC3_D2	USART2_TX	FMC_A5												
71	PF2	FMC_A2	I2C2_SMBA	SDMMC1_D ODIR	SDMMC2_D ODIR	SDMMC3_D ODIR	FMC_A2										
72	PF3	FMC_A3	ETH1_TX_ER	FMC_A3													
73	PF0	FMC_A0	I2C2_SDA	SDMMC3_C KIN	SDMMC3_D 0	FMC_A0											

Pin	Signal Name	Alternative Modes															
		0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
74	PF1	FMC_A1	I2C2_SCL	SDMMC3_CDIR	SDMMC3_CMD	FMC_A1											
75	PI10	ETH1_RX_ER	LTDC_HSYNC	SYS_HDP0	USART3_CTS	USART3_NSS											
76	GND																
77	PB8	LTDC_B6	DCMI_D6	DFSDM1_CKIN7	ETH1_TXD3	FDCAN1_RX	I2C1_SCL	I2C4_SCL	LTDC_B6	SDMMC1_CKIN	SDMMC1_D4	SDMMC2_CKIN	SDMMC2_D4	SYS_HDP6	TIM16_CH1	TIM4_CH3	UART4_RX
78	PD8	LTDC_B7	DFSDM1_CKIN3	FMC_D13	LTDC_B7	SAI3_SCK_B	SPDIFRX_IN1	USART3_TX									
79	PI4	LTDC_B4	DCMI_D5	LTDC_B4	SAI2_MCLK_A	TIM8_BKIN											
80	PI5	LTDC_B5	DCMI_VSYNC	LTDC_B5	SAI2_SCK_A	TIM8_CH1											
81	PI2	LTDC_G7	DCMI_D9	I2S2_SDI	LTDC_G7	SPI2_MISO	TIM8_CH4										
82	PD10	LTDC_B3	DFSDM1_CKOUT	FMC_D15	I2C5_SMBA	I2S3_SDI	LTDC_B3	RTC_REFIN	SAI3_FS_B	SPI3_MISO	TIM16_BKIN	USART3_CK					
83	PI0	LTDC_G5	DCMI_D13	I2S2_WS	LTDC_G5	SPI2_NSS	TIM5_CH4										
84	PI1	LTDC_G6	DCMI_D8	I2S2_CK	LTDC_G6	SPI2_SCK	TIM8_BKIN2										
85	PE11	LTDC_G3	ADC1_EXTI11	ADC2_EXTI11	DFSDM1_CKIN4	FMC_D8	LTDC_G3	SAI2_SD_B	SPI4_NSS	TIM1_CH2	USART6_CK						
86	PH15	LTDC_G4	ADC1_EXTI15	ADC2_EXTI15	DCMI_D11	LTDC_G4	TIM8_CH3N										
87	PE15	LTDC_R7	ADC1_EXTI15	ADC2_EXTI15	FMC_D12	LTDC_R7	SYS_HDP3	TIM15_BKIN	TIM1_BKIN	UART8_CTS	USART2_CTS	USART2_NSS					
88	PA6	LTDC_G2	ADC1_INP3	ADC2_INP3	DCMI_PIXCLK	I2S1_SDI	LTDC_G2	SAI4_CK2	SAI4_SCK_A	SPI1_MISO	SPI6_MISO	TIM13_CH1	TIM1_BKIN	TIM3_CH1	TIM8_BKIN	MDIOS_MDC	
89	PH11	LTDC_R5	ADC1_EXTI11	ADC2_EXTI11	DCMI_D2	I2C1_SCL	I2C4_SCL	LTDC_R5	TIM5_CH2								
90	PH12	LTDC_R6	DCMI_D3	I2C1_SDA	I2C4_SDA	LTDC_R6	SYS_HDP2	TIM5_CH3									
91	PH9	LTDC_R3	DAC1_EXTI9	DCMI_D0	I2C3_SMBA	LTDC_R3	TIM12_CH2										
92	PH10	LTDC_R4	DCMI_D1	I2C1_SMBA	I2C4_SMBA	LTDC_R4	TIM5_CH1										
93	PG7	LTDC_CLK	DCMI_D13	LTDC_CLK	QUADSPI_BK2_J03	QUADSPI_CLK	SAI1_MCLK_A	SYS_TRACED5	UART8_DE	UART8_RTS	USART6_CK	FMC_INT					
94	PI9	LTDC_VSYNC	DAC1_EXTI9	FDCAN1_RX	LTDC_VSYNC	SYS_HDP1	UART4_RX										
95	PE13	DFSDM1_CKIN5	FMC_D10	LTDC_DE	SAI2_FS_B	SPI4_MISO	SYS_HDP2	TIM1_CH3									
96	PC6	LTDC_HSYNC	DCMI_D0	DFSDM1_CKIN3	DSIHOST_TE	I2S2_MCK	LTDC_HSYNC	SDMMC1_D0DIR	SDMMC1_D6	SDMMC2_D0DIR	SDMMC2_D6	SYS_HDP1	TIM3_CH1	TIM8_CH1	USART6_TX		
97	PZ6		I2C2_SCL	I2C4_SMBA	I2C6_SCL	I2S1_MCK											
98	PZ7		I2C2_SDA	I2C6_SDA	USART1_TX												
99	GND																
100	GND																

3.4. Power Supply

- > The byteENGINE can be powered with 3.3V to 5.5V.
- > The recommended power supply is 5V
- > Maximum Power Consumption is 2W, typical 1W



[STPMIC1 Power Management IC](#)

3.5. Boot Modes byteENGINE STM32MP1x

- > Default boot mode:

BOOT0	1
BOOT1	0
BOOT2	1 (SDCARD)

- > BOOT2 is connected to X1:1 and can select the boot source. Use an open drain buffer or switch to control this pin. It is pulled up at 1kOhm on the Module.

Chart Boot Modes

BOOT2	Boot Source
hiZ	SDCARD
0	SPI Nor Flash



See Chapter “3.7 Boot Modes” of the STM32MP15x Datasheet:
[STM32MP1x Data Sheet](#)

4. Ordering info

The Order Code allows customers to easily recognize the detailed specification of the ordered SOM. Please refer to chapter [Decision guidance byteENGINE STM32MP1x](#) for further information.

byteENGINE-STM32MP15[TYPE]-[SPEED]-[RAM]-[FLASH]-[temp-range]-[revision]

[TYPE]	CPU type	Comprehensive, see Additional Information
[SPEED]	Clock speed	650 MHz / 800 MHz
[RAM]	RAM size	512 / 1024 MB
[FLASH]	eMMC flash size	8 / 16 / 32 / 64 GB
[temp-range]	Temperature range	[C] Consumer 0° to +85° C [I] Industrial -40°C to +85 °C
[revision]	Revision	1.2

5. References



Notice

Files can only be downloaded with login credentials. Please request your download credentials via support@bytesatwork.ch or contact your sales representative



Links

- > Schematic of the connectors X1 and X2:
[Schematic of the connectors](#)
- > Altium Schematic of the connectors X1 and X2:
[Altium Schematic of the connectors](#)
- > Altium Library:
[Altium Library](#)
- > STEP Model:
[STEP Model](#)
- > Detailed Pinout of byteENGINE STM32MP1x:
[Detailed Pinout of byteENGINE STM32MP1x](#)
- > STMicroelectronics STM32MP1 Series:
[STM32MP1 Series](#)
- > bytesatwork on github:
<https://github.com/bytesatwork>
- > byteWIKI:
<https://bytewiki.readthedocs.io/en/latest/som/stm32mp1x.html>



Contact Information



Address

bytesatwork
Technoparkstrasse 7
CH-8406 Winterthur
Switzerland



Phone

Phone: +41 52 213 79 79



Email

support@bytesatwork.ch



Product Information

www.bytesatwork.io



Help

bytewiki.readthedocs.io